



Sony Xperia TL Battery Replacement

This guide will teach you how to access and remove the battery.

Written By: Adam Giniger



INTRODUCTION


Removing this part is hard for the first time because the manufacturer used adhesive to keep it in place.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Remove Top Plastic Section

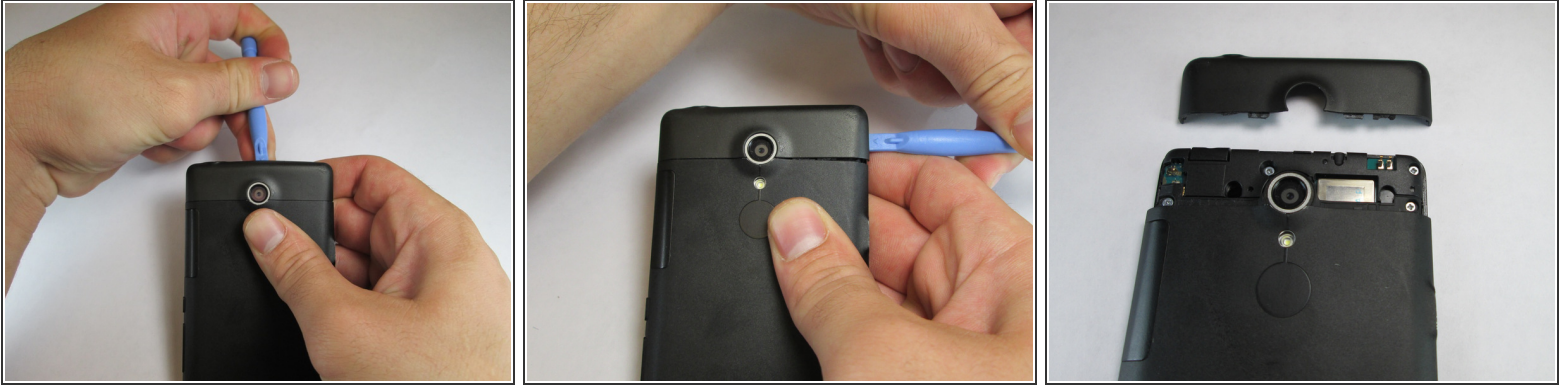

- Use the plastic opening tool to pry the top plastic section off.

Step 2 — Remove Bottom Plastic Section




- Use the plastic opening tool to pry the bottom plastic section off.

Step 3 — Unscrewing the Back Off



- Remove the four 5mm screws.
- Use the plastic opening tool to pry off the back.

Step 4 — Battery

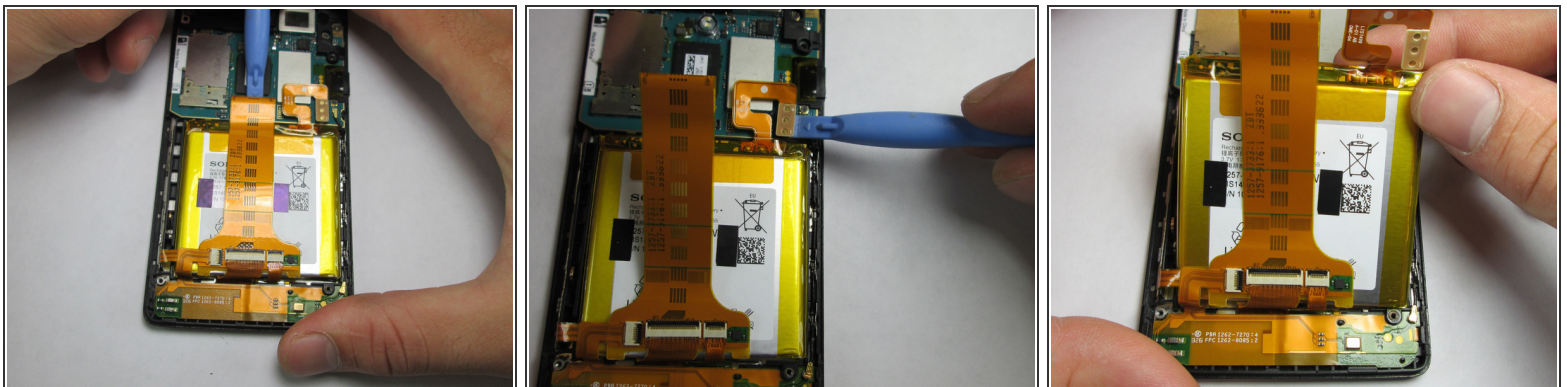

- Use the plastic opening tool to detach the ribbon running across the battery.
- Use the plastic opening tool to detach the ribbon connecting the battery to the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-27 04:55:13 AM.